
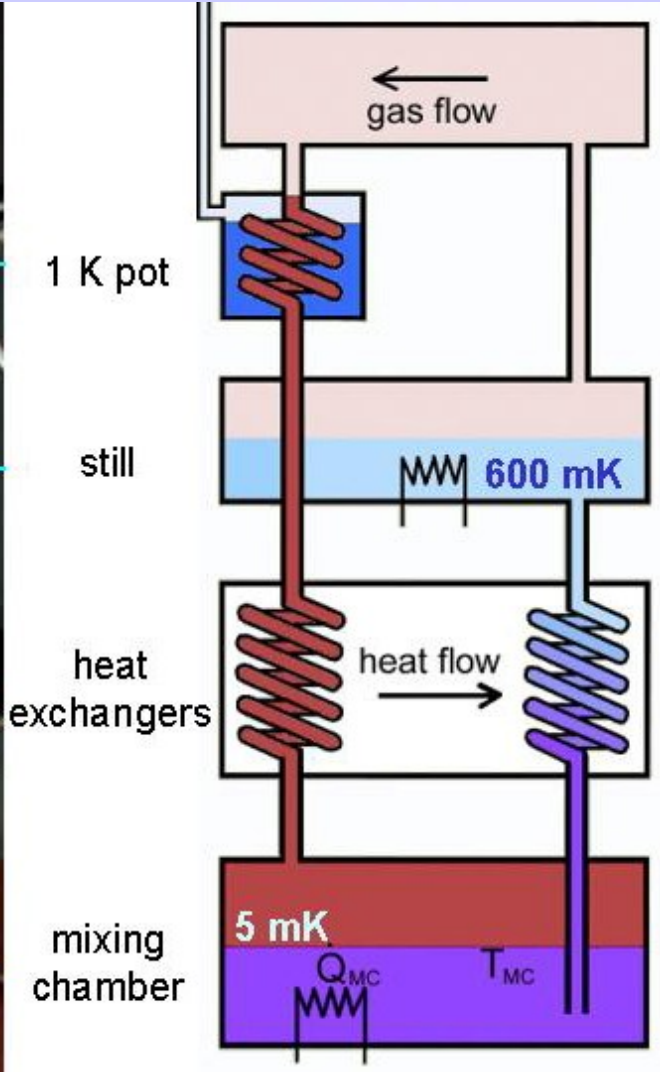


A numerical analysis of the behavior of sintered heat exchangers

For the IEN-project

By Bart-Jan Pors

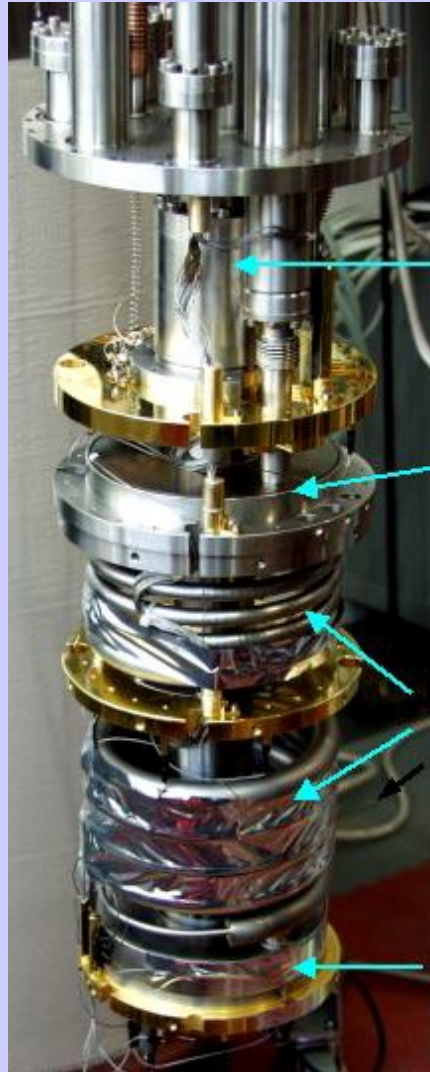


Heat effects in the heat exchanger:

- Heat exchange
- Viscosity
- Thermal conductivity

Heat exchange

Phonon coupling

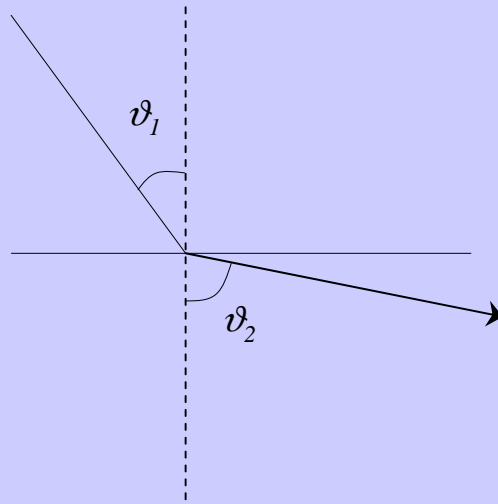

$$\frac{\sin \vartheta_1}{\sin \vartheta_2} = \frac{v_1}{v_2}$$

Heat exchange

Kapitza resistance:

$$R_k = \frac{\alpha_k}{\sigma T^3} \quad \sigma \text{ surface area}$$

Heat exchange:

$$\dot{Q} = \frac{\sigma}{4\alpha_k} (T_C^4 - T_D^4)$$

Viscosity

$$\Delta\dot{Q}_{visc} = \dot{V}\Delta P$$

\dot{V} volume flow, P pressure drop

with


$$\Delta P = \Delta Z \eta \dot{V}$$

η viscosity, Z geometrical impedance

At $T < 50 \text{ mK}$: $\eta = \eta(T) = \frac{\eta_0}{T^2} [\text{Pa} \cdot \text{s}]$

Viscosity

Geometrical Impedance:

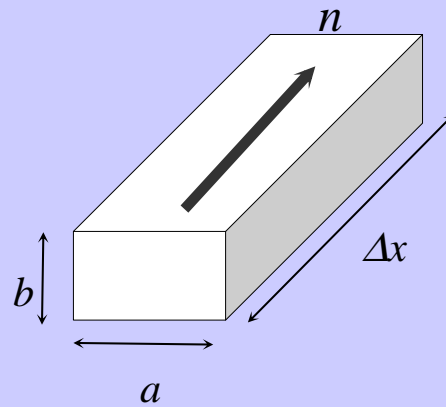

$$\Delta Z = \frac{12}{ab^3} \Delta x$$

Thermal conductivity

$$\dot{Q}_{cond} = -kA \frac{dT}{dx}$$

At $T < 50 \text{ mK}$: $k = k(T) = \frac{k_0}{T} [\text{WK}^{-1}\text{m}^{-1}]$

Enthalpy balance

$$\frac{d}{dx} (Q_{cond} + Q_{visc} + Q_{exch}) = \frac{d}{dx} (nH(T))$$

with $dH = C_p dT$

H enthalpy, C specific heat, \dot{n} molar flow

Frossati's method

$$\frac{d}{dx} (Q_{exch} + Q_{visc} + Q_{cond}) \rightarrow \frac{d}{dx} Q_{exch}$$

perfect heat exchangers

$$\lambda \frac{d\sigma}{dx} (T_C^4 - T_D^4) = nC_C \frac{dT_C}{dx}$$


$$dH_C = dH_D$$

Frossati's method


$$T_C^{-2}(0) = \left[\frac{2\lambda\sigma}{a} \left(1 - \left(\frac{a}{b} \right)^2 \right) + T_C^{-2}(l) \right] \frac{1}{\dot{n}}$$

$$\frac{\dot{Q}}{\dot{n}} = 94,5T_{MC}^2 - 12,5T_C^2(0)$$


Frossati's method

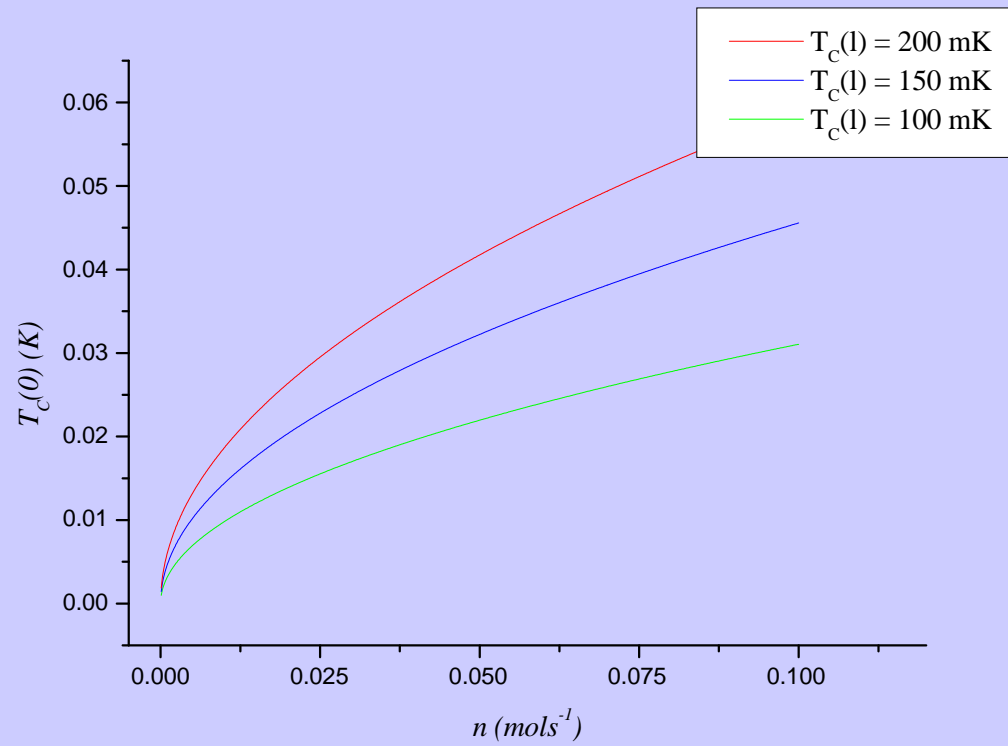

Frossati's method

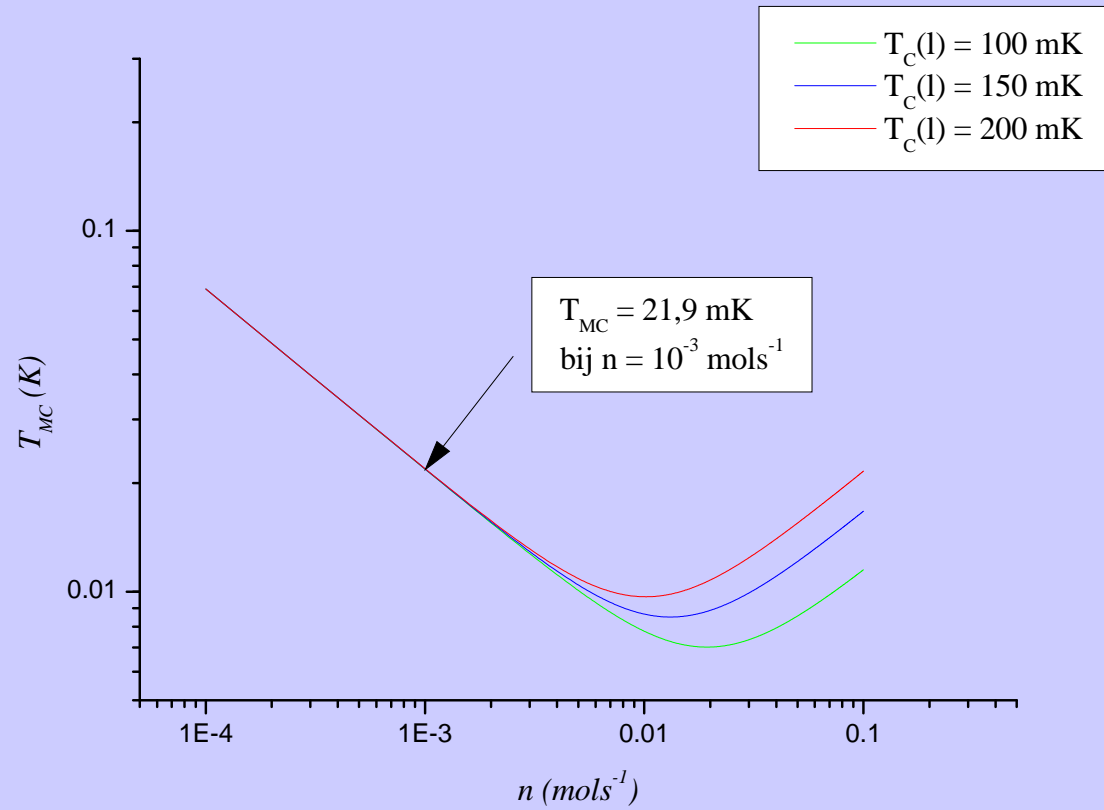


Frossati's method

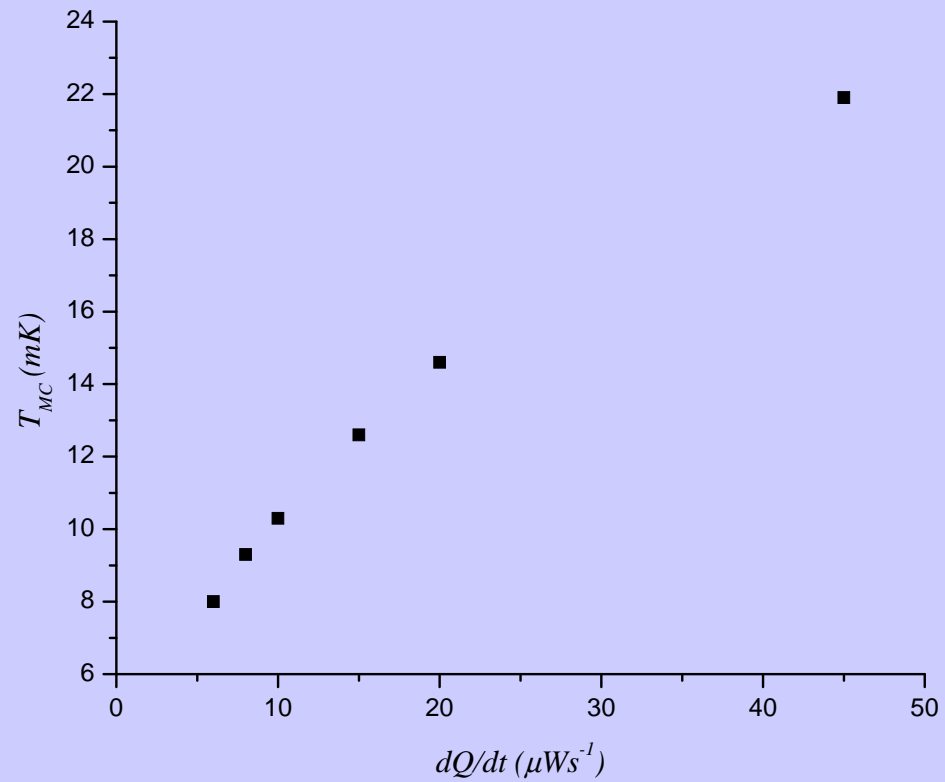


$$\sigma \sim 200 - 300 \text{ m}^2, \dot{N} \sim 10^{-3} \text{ mols}^{-1}$$

Method of imposed temperature profile

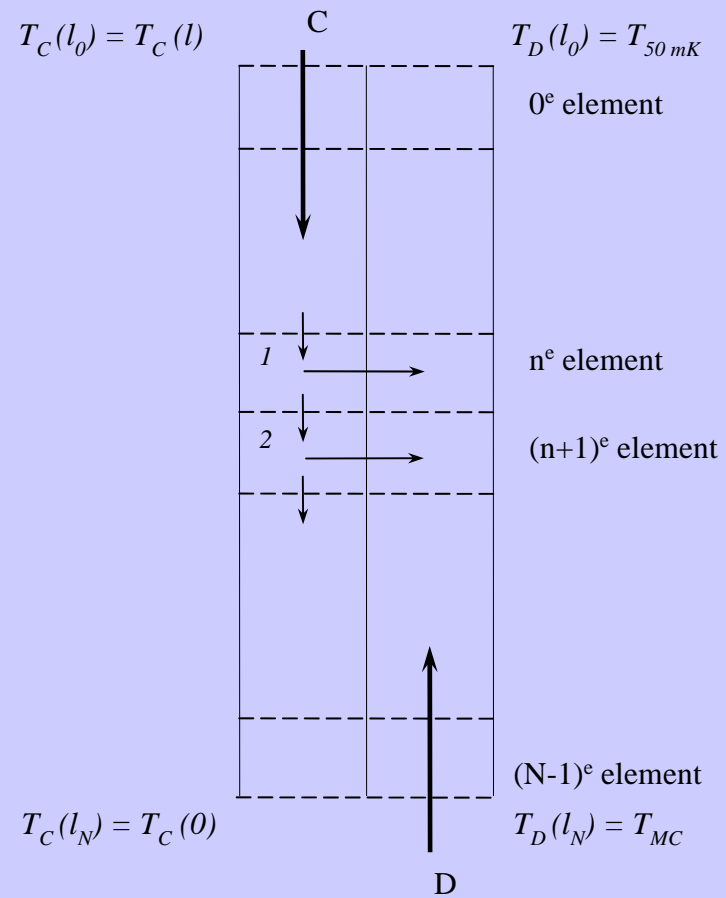


Method of imposed temperature profile

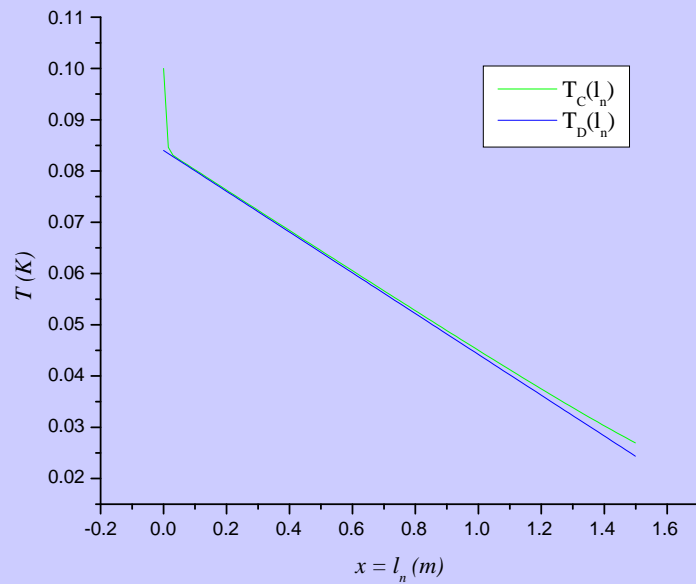

$$T_C(l_N) = 26,96mK$$



$$T_{MC} = 24,31mK$$

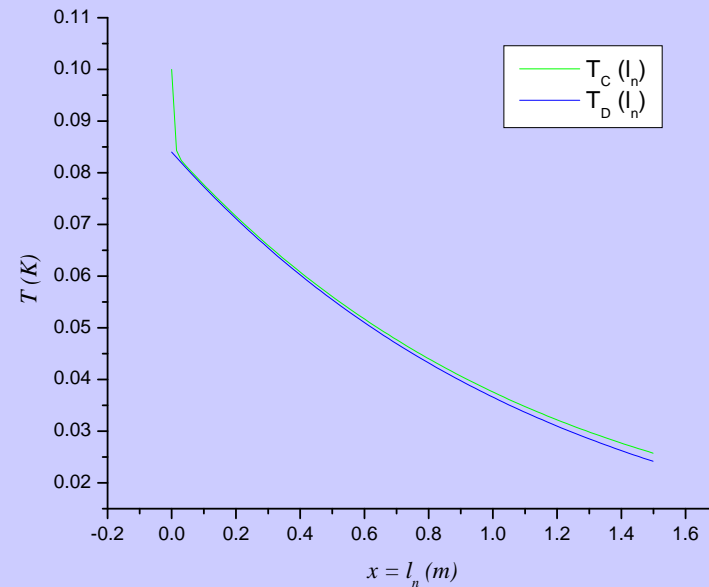

$$T_C(l_N) = 25,76mK$$


$$T_{MC} = 24,14mK$$

Method of imposed temperature profile

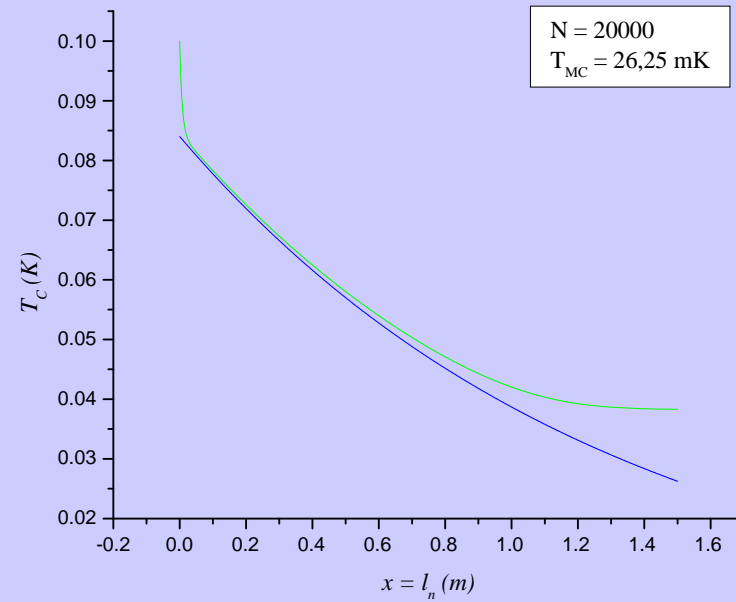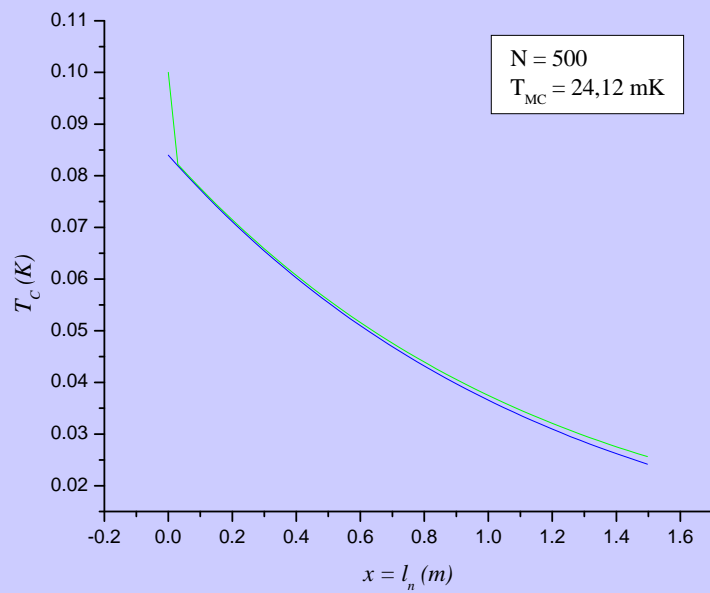


Building up of errors for increasing number of elements

Method of relaxation to thermal equilibrium

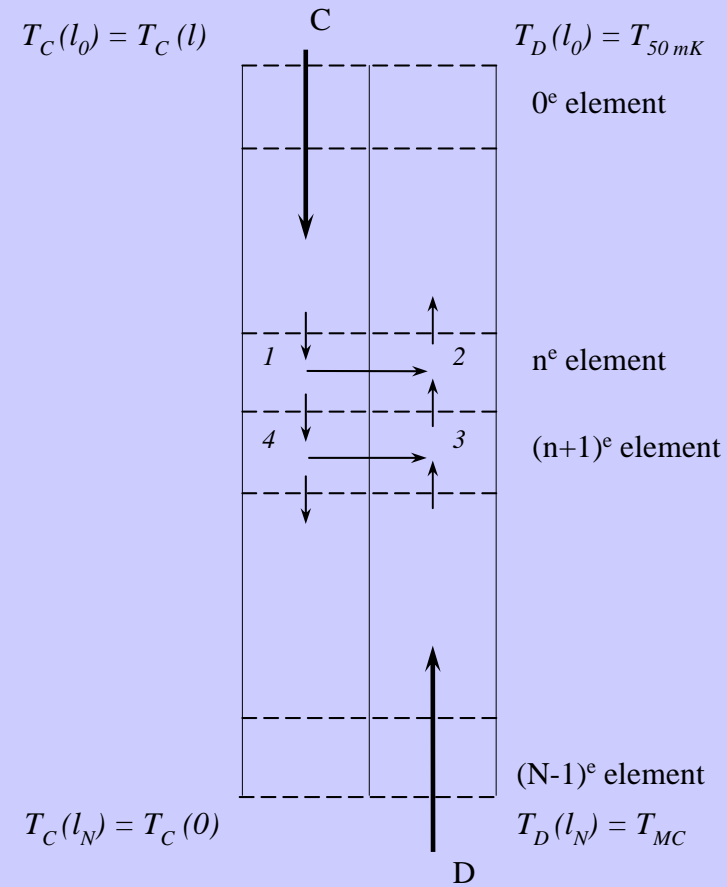

Method of relaxation to thermal equilibrium

- Impose reasonable temperature profiles on both phases
- Start at $T_C(l_0)$ and calculate all new $T_C(l_n)$ and $T_D(l_n)$
- Compare new and old profiles
- Move values to next elements
- Repeat this procedure until equilibrium occurs

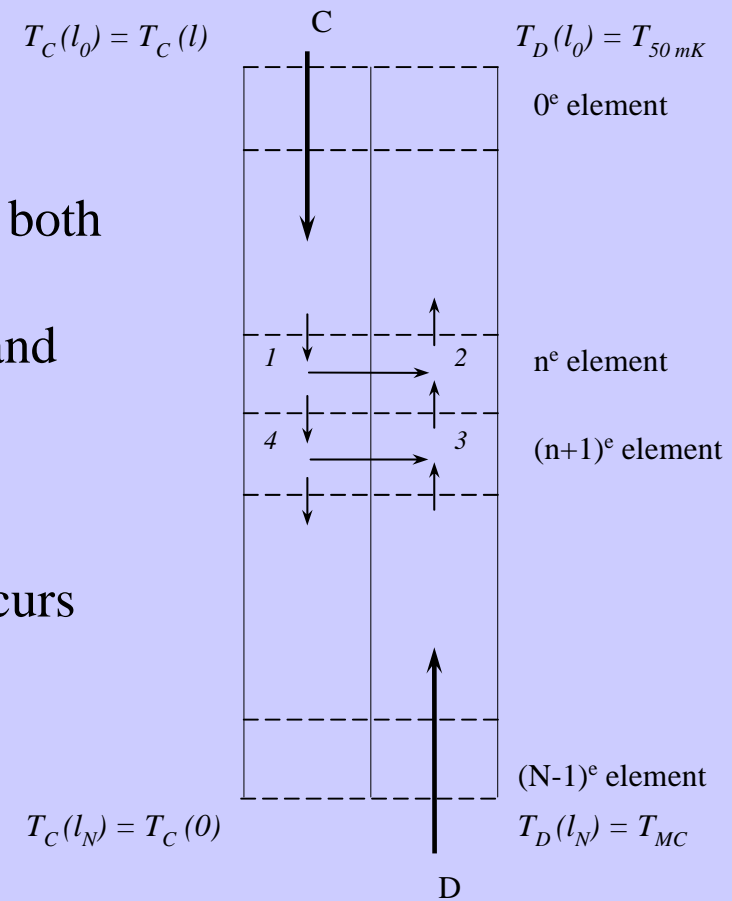

Accuracy and approximations

Physical

- Geometrical impedance for square tube used
- Radial temperature relation (Reynolds)
- Molar volume and heat capacity related to concentration ^3He in ^4He

Computational

- Numerical integration techniques
- Building up errors

Conceptual

- Imposed temperature profiles
- Moving values to next elements